Filterline - BFL™ S/Steel Bag Filter Housing

FEATURES / BENEFITS

- Accepts size #01 single and size #02 double length filter bags non-code housing
- Constructed to handle flow rate 20m³/hr and 40m³/hr
- Choices of 304 s/steel or 316L s/steel available
- Stainless steel basket included
- Concave cover with V-Clamp closure

HOUSING SPECIFICATIONS

- Maximum operating pressures : 100psi (7 bar)
- Maximum operating temperature : 120°C
- Connection inlet/outlet : 2" NPT
- Vent : ¼" NPT
- Drain : ½" NPT
- Shell O-ring : NPR

FT-MODEL	A	B	C	DØ	FØ
BFL-1	500mm	380mm	700mm	200mm	170mm
BFL-2	700mm	720mm	1050mm	200mm	170mm
BFL-3	350mm	190mm	400mm	114mm	97mm
BFL-4	500mm	340mm	540mm	114mm	97mm

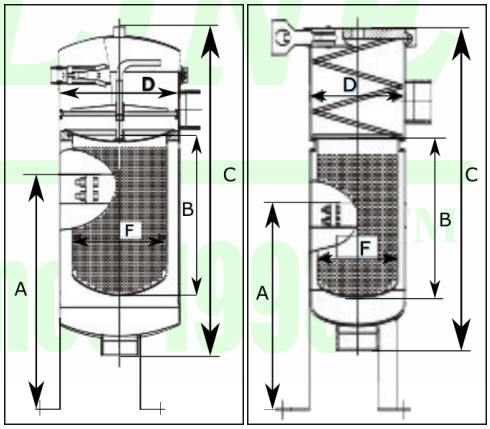

ORDERING INFORMATIONS

FT-Model	Size	Material	Closure
↓	↓	↓	↓
FT-BFL	1 (7" x 17") 2 (7" x 32") 3 (4" x 9") 4 (4" x 15")	SS304 SS316L	C = Clamp lid

FILTERLINE Filters Since 1993™
www.filterline-filters.com
sales@filterline-filters.com | filterline@gmail.com
Phone : +604 - 324 4948 | Fax : +604 - 324 4946
© Filterline Malaysia. All right reserved.

DISCLAIMER

This document and other information from Filterline Malaysia provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product of system in the current product catalog. Due to the variety of operation conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the applications are met. The products described herein, including without limitation, products features, specifications, designs, availability and pricing, are subject to change by Filterline Malaysia at any time without notice.